
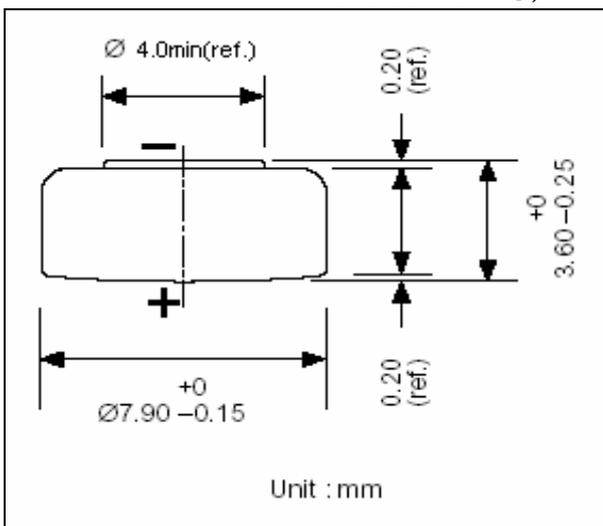
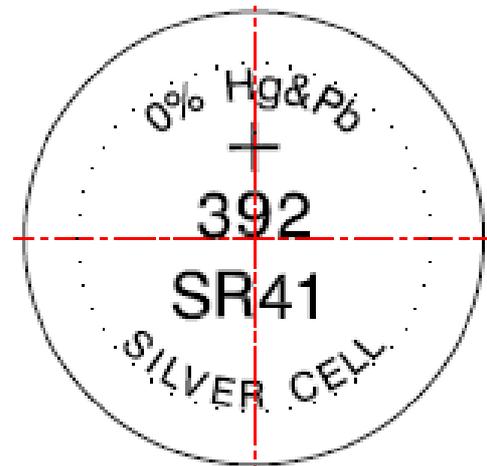


Model No.: **GP392F**

<b>Description</b>	: Mercury and Lead Free Alkaline Battery
<b>Chemical System</b>	: Zinc/Silver Oxide
<b>Nominal Voltage</b>	: 1.55V
<b>Nominal Dimension</b>	: $\Phi$ 7.90mm $\times$ 3.60mm
<b>Applications</b>	: Watch(with alarm and lamp), Calculator, hearing aid , digital Thermometer etc .
<b>Average Weight</b>	: 0.7 g
<b>Shelf Life</b>	: Not less than 90% of the service capacity within first year, Not less than 85% of the service capacity within second year storage at $20 \pm 2^\circ\text{C}$ Max 85 %RH.
<b>Date Code</b>	: Unless otherwise specified, each cell will carry a numeric year code and an alphabetical month code.
<b>Close Circuit Voltage</b>	: 1.3 V(min.)(load resistor $200\ \Omega$ at $20\pm 2^\circ\text{C}$ for 0.1 to 2 seconds
<b>Lot Acceptance Test</b>	: 42 mAh (load $6.2\ \text{k}\Omega$ to cut off 1.2 V under $20\pm 2^\circ\text{C}$ )
<b>Service Output Test</b>	: 160hrs (load $6.2\ \text{k}\Omega$ to cut off 1.2V under $20\pm 2^\circ\text{C}$ )

Typical discharge curve at  $20\pm 2^\circ\text{C}$

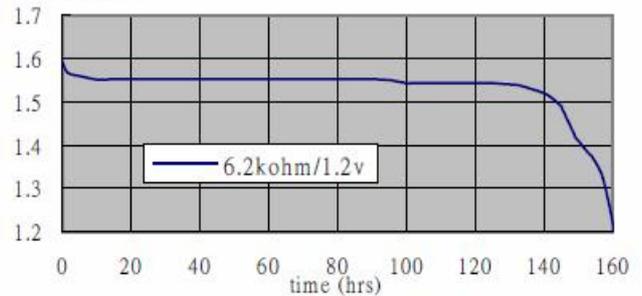

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.