

Marathon PowerCycle / M12V100PC

INDUSTRIAL BATTERIES / NETWORK POWER

The Marathon PowerCycle demonstrates exceptional performance in good grid conditions and reliable backup power in float operations. Its additional powerful features offer even more in these markets. They support challenges such as 5G deployment and ongoing Network densification, which require specialized batteries in small packages and longer life with higher temperature resistance. With its enhanced cycle life, the Marathon PowerCycle also addresses new trends such as decentralized energy solutions and the need for more sustainability.

Part Number: NAMC120100HM0FA

APPLICATIONS



SPECIFICATIONS

- Design life: 20 years (until 80% C_{10} at 20°C and 1.80Vpc)
- EUROBAT 2015 Classification »>12 years – Very Long Life«
- Extended life time at high-temperature operation:
10 years at 35°C, 7 years at 40°C
- 1500 cycles at 60% depth of discharge (C_{10}) at 20°C
- High-Compression Absorbent Glass Mat (AGM) technology
- Unique Carbon Boost® for efficient charging
- MICROCAT® Catalyst reduces float current and minimizes water loss
- Grid plates with high-purity lead, low calcium, high-tin alloy for excellent corrosion resistance
- Available as standard or flame retardant version (UL 94 V-0)
- Very low gassing due to internal gas recombination (99 % efficiency)
- Low self discharge rate, enabling extended storage capability
- Designed in accordance with IEC 60896-21/22
- Approval: UL (Underwriters Laboratories)
- Trouble-free transportation without restriction for most rail, road, sea and air transportation (IATA, DGR clause A67)
- Manufactured in Europe in our ISO 9001 certified production plants
- Central degassing



Design life
20 years



Block battery



Grid plate



Recyclable



Valve
regulated
lead-acid
batteries



Maintenance
free (no
topping up)

RECYCLE WITH EXIDE.



Exide Technologies takes pride in its commitment to a better environment. An integrated approach to manufacturing, distributing and recycling of lead-acid batteries has been developed to ensure a safe and responsible life cycle for all of its products.

EXIDE Distributionscenter Frankfurt a.M.

ACCU-24 Batterien & Systeme GmbH

Untergasse 5

63688 Gedern

Tel.: +49 (0) 06045 952520

Fax: +49 (0) 06045 952966

www.ACCU-24.de

GNB
INDUSTRIAL POWER
A Division of Exide Technologies

MARATHON
POWERCYCLE

info@accu-24.de

TECHNICAL CHARACTERISTICS AND DATA

Nominal voltage	12 V
Float charge	2,29 V/C @ 20 °C
Capacity	CC 10h 1,8V/C 20°C 100Ah
Short circuit current	2347 A (IEC60896-21/22)
Internal resistance	5,1 mΩ (IEC60896-21/22)

Terminal	F-M6-90°
Terminal Torque	11 Nm
Container	UL 94 HB (Polypropylene)
Temperature range	-40°C to 55°C
Dimensions (l x b/w x h)	105 x 395 x 287 mm
Weight	33,5 kg
Origin	Castanheira, Portugal


CONSTANT POWER DISCHARGE

W @ 20 °C	1 h	90 min	2 h	150 min	3 h	4 h	5 h	6 h	7 h	8 h	9 h	10 h	12 h	24 h	48 h	72 h	100 h	120 h
1,940 V/C	637	446	366	311	257	199	163	139	121	109	98,3	88,8	75,5	39,1	20,3	14	10,2	8,63
1,900 V/C	751	525	432	368	304	234	191	162	141	127	114	104	88	45,5	23,7	16,3	11,9	10,1
1,850 V/C	791	553	459	391	324	250	204	173	151	136	122	111	94	48,7	25,3	17,4	12,7	10,7
1,800 V/C	810	567	470	401	332	256	209	177	154	140	126	113	96,5	49,9	25,9	17,8	13	11
1,750 V/C	829	581	480	410	339	263	214	182	159	142	128	116	98,6	51	26,5	18,2	13,3	11,3
1,700 V/C	834	584	484	414	344	267	217	185	161	143	129	117	99,3	51,4	26,7	18,4	13,4	11,3
1,650 V/C	839	587	487	418	348	270	220	187	163	145	131	118	101	52,1	27,1	18,6	13,6	11,5
1,600 V/C	844	591	490	421	353	274	223	190	165	146	131	119	101	52,4	27,2	18,7	13,7	11,6


CONSTANT CURRENT DISCHARGE

A @ 20 °C	1 h	90 min	2 h	150 min	3 h	4 h	5 h	6 h	7 h	8 h	9 h	10 h	12 h	24 h	48 h	72 h	100 h	120 h
1,940 V/C	48	34,6	29,8	25,2	21,6	17,1	14,2	12,1	10,5	9,41	8,62	8	6,8	3,6	1,82	1,25	0,916	0,775
1,900 V/C	56,2	40,3	33,6	28,2	24	19	15,8	13,4	11,7	10,5	9,6	8,9	7,6	4	2,02	1,39	1,02	0,861
1,850 V/C	61,4	44	36,8	30,8	26	20,6	17,2	14,6	12,7	11,3	10,4	9,6	8,2	4,3	2,17	1,49	1,09	0,926
1,800 V/C	64,8	46,4	38,7	32,3	27,1	21,4	17,7	15	13,1	11,7	10,8	10	8,5	4,5	2,27	1,53	1,11	0,95
1,750 V/C	67,2	48	39,6	33,1	27,8	21,9	18,1	15,5	13,4	12	11,1	10,3	8,77	4,64	2,35	1,57	1,14	0,979
1,700 V/C	69,1	49,4	40,7	34	28,6	22,4	18,4	15,6	13,6	12,3	11,3	10,5	8,98	4,75	2,38	1,61	1,17	1
1,650 V/C	71	50,7	41,4	34,5	29,1	22,9	18,8	16	13,9	12,5	11,5	10,7	9,12	4,82	2,43	1,65	1,19	1,02
1,600 V/C	72	51,4	41,8	34,8	29,3	23	18,9	16,1	14	12,6	11,6	10,8	9,19	4,86	2,47	1,66	1,2	1,03

Technical drawing



Float Voltage vs Temperature

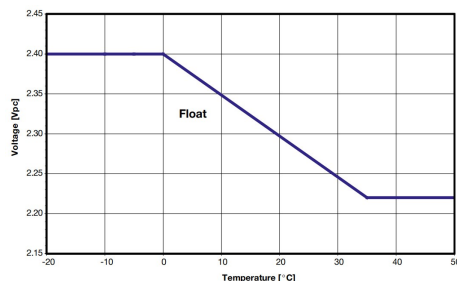

EXIDE Distributionscenter Frankfurt a.M.

ACCU-24 Batterien & Systeme GmbH

Untergasse 5

63688 Gedern

Tel.: +49 (0) 06045 952520

Fax: +49 (0) 06045 952966

www.ACCU-24.de

info@accu-24.de

GNB
INDUSTRIAL POWER
A Division of Exide Technologies

MARATHON
POWERCYCLE