

Marathon PowerCycle / M12V155PC

INDUSTRIAL BATTERIES / NETWORK POWER

The Marathon PowerCycle demonstrates exceptional performance in good grid conditions and reliable backup power in float operations. Its additional powerful features offer even more in these markets. They support challenges such as 5G deployment and ongoing Network densification, which require specialized batteries in small packages and longer life with higher temperature resistance. With its enhanced cycle life, the Marathon PowerCycle also addresses new trends such as decentralized energy solutions and the need for more sustainability.

Part Number: NAMC120155HM0FA

APPLICATIONS



SPECIFICATIONS

- Design life: 20 years (until 80% C₁₀ at 20°C and 1.80Vpc)
- EUROBAT 2015 Classification » > 12 years – Very Long Life«
- Extended life time at high-temperature operation: 10 years at 35°C, 7 years at 40°C
- 1500 cycles at 60% depth of discharge (C₁₀) at 20°C
- High-Compression Absorbent Glass Mat (AGM) technology
- Unique Carbon Boost® for efficient charging
- MICROCAT® Catalyst reduces float current and minimizes water loss
- Grid plates with high-purity lead, low calcium, high-tin alloy for excellent corrosion resistance
- Available as standard or flame retardant version (UL 94 V-0)
- Very low gassing due to internal gas recombination (99 % efficiency)
- Low self discharge rate, enabling extended storage capability
- Designed in accordance with IEC 60896-21/22
- Approval: UL (Underwriters Laboratories)
- Trouble-free transportation without restriction for most rail, road, sea and air transportation (IATA, DGR clause A67)
- Manufactured in Europe in our ISO 9001 certified production plants
- Central degassing



Design life
20 years



Block battery



Grid plate



Recyclable



Valve
regulated
lead-acid
batteries



Maintenance
free (no
topping up)

RECYCLE WITH EXIDE.



Exide Technologies takes pride in its commitment to a better environment. An integrated approach to manufacturing, distributing and recycling of lead-acid batteries has been developed to ensure a safe and responsible life cycle for all of its products.

EXIDE Distributionscenter Frankfurt a.M.

ACCU-24 Batterien & Systeme GmbH

Untergasse 5

63688 Gedern

Tel.: +49 (0) 06045 952520

Fax: +49 (0) 06045 952966

www.ACCU-24.de

GNB
INDUSTRIAL POWER
A Division of Exide Technologies

MARATHON
POWERCYCLE

info@accu-24.de

TECHNICAL CHARACTERISTICS AND DATA

Nominal voltage	12 V
Float charge	2,29 V/C @ 20 °C
Capacity	CC 10h 1,8V/C 20°C 155Ah
Short circuit current	3158 A (IEC60896-21/22)
Internal resistance	3,9 mΩ (IEC60896-21/22)

Terminal	F-M6-90°
Terminal Torque	11 Nm
Container	UL 94 HB (Polypropylene)
Temperature range	-40°C to 55°C
Dimensions (l x b/w x h)	125 x 559 x 283 mm
Weight	53,3 kg
Origin	Castanheira, Portugal


CONSTANT POWER DISCHARGE

W @ 20 °C	1 h	90 min	2 h	150 min	3 h	4 h	5 h	6 h	7 h	8 h	9 h	10 h	12 h	24 h	48 h	72 h	100 h	120 h
1,940 V/C	819	617	504	422	366	291	244	205	182	165	147	135	115	61,4	31,9	21,9	16	13,6
1,900 V/C	1029	747	595	499	439	352	294	246	214	197	176	161	136	72,1	37,5	25,8	18,8	15,9
1,850 V/C	1114	805	639	534	470	373	310	262	227	205	187	172	145	77	40	27,5	20,1	17
1,800 V/C	1137	822	654	545	485	383	320	272	235	212	189	175	147	77,9	40,5	27,8	20,3	17,2
1,750 V/C	1148	832	662	553	500	390	324	275	238	213	190	175	148	78,5	40,8	28	20,5	17,3
1,700 V/C	1154	836	665	556	501	392	325	276	239	214	191	176	148	78,6	40,8	28,1	20,5	17,3
1,650 V/C	1161	840	668	557	502	394	327	277	240	215	192	177	148	78,9	41	28,2	20,6	17,4
1,600 V/C	1170	845	670	560	505	397	329	278	241	216	193	178	150	80	41,6	28,6	20,9	17,7


CONSTANT CURRENT DISCHARGE

A @ 20 °C	1 h	90 min	2 h	150 min	3 h	4 h	5 h	6 h	7 h	8 h	9 h	10 h	12 h	24 h	48 h	72 h	100 h	120 h
1,940 V/C	71	54	44,4	37,2	32,2	25,2	20,9	17,6	15,4	13,8	12,6	11,7	10	5,3	2,69	1,85	1,36	1,15
1,900 V/C	80,5	60,9	49,9	41,5	35,5	27,9	23,1	19,8	17,4	15,6	14,3	13,3	11,2	5,9	2,99	2,06	1,51	1,28
1,850 V/C	89,2	66,9	54,6	45,2	38,7	30,3	25,1	21,6	18,8	16,9	15,5	14,4	12,1	6,4	3,25	2,23	1,64	1,39
1,800 V/C	95,8	70,9	57,2	47,4	40,5	32,2	26,9	23,3	20,4	18,1	16,7	15,5	13	6,6	3,35	2,3	1,69	1,43
1,750 V/C	99,1	72,7	58,4	48,4	41,8	33,1	27,8	24,1	20,9	18,4	16,9	15,8	13,3	6,74	3,42	2,35	1,72	1,46
1,700 V/C	101	73,9	59,2	49,2	42,7	33,4	28	24,3	21,1	18,6	17,1	15,9	13,4	6,81	3,45	2,37	1,74	1,47
1,650 V/C	103	75	60	49,7	43,2	33,8	28,2	24,5	21,3	18,9	17,3	16	13,5	6,91	3,51	2,41	1,77	1,5
1,600 V/C	105	75,5	61	50	43,5	34,1	28,4	24,6	21,4	19	17,4	16,1	13,6	6,95	3,53	2,42	1,78	1,51

Technical drawing

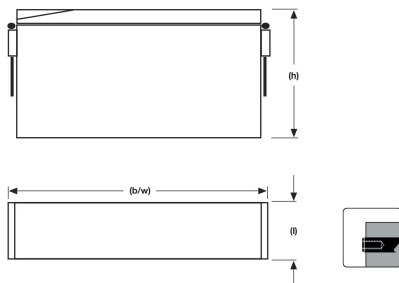

Float Voltage vs Temperature

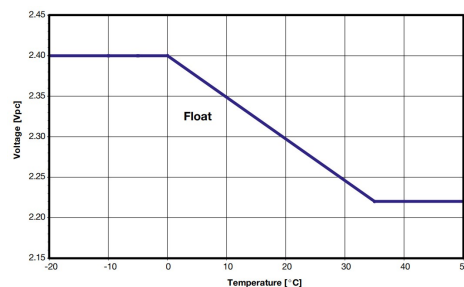

EXIDE Distributionscenter Frankfurt a.M.

ACCU-24 Batterien & Systeme GmbH

Untergasse 5

63688 Gedern

Tel.: +49 (0) 06045 952520

Fax: +49 (0) 06045 952966

www.ACCU-24.de

info@accu-24.de

GNB
INDUSTRIAL POWER
A Division of Exide Technologies

MARATHON
POWERCYCLE